

济宁康推机电设备有限公司
Jining Kangtui Electromechanical Equipment Co., Ltd.

HCS83-762 HCS83-635
• 农机履带规格 •
Specifications of Agricultural Machinery Tracks

技术参数 Technical Parameters		
产品型号 Product Mode	HCS83-762	HCS83-635
配套机型 Matching Model	FENDT5160 C/5180 C/5180 E/5185 E/5220E5220/5225 E	
	LovoL Gk120	
	CASE 4077HD/4088/4099	
	JohnDeere C440/W100/R2300	
	New Hollang 4088 /CR8.90/CX8090/TX32/TX5.90	
长 Length	2667mm	2667mm
宽 Width	762mm	747mm
高 Height	1339mm	1339mm
履带宽度 Track width	762mm	635mm
接地面积 Ground Contact Area	2.03㎡	1.69㎡
重量 Weight,	1830kg（单个） (PerUnit)	1730kg（单个） (PerUnit)
外形尺寸 Overall dimensions	2667×1339×762 (mm)	2667×1339×747 (mm)

性能特点 Performance Characteristics
★最高车速40km/h Maximum speed: 40 km/h
★减小车辆接地比压，提高车辆通过性 Reduce the ground pressure of the vehicle and improve its trafficability.
★保护耕地，防止土地板结，助力绿色农业 Protect cultivated land, prevent soil compaction, and support green agriculture.
★百分百免维护支重轮和张紧轮毂、驱动轴 100% maintenance-free support rollers, tension hubs and drive shafts.
★降低油耗10%—30%，技能环保 Reduce fuel consumption by 10%–30%, energy-saving and environmentally friendly.
★配备蓄能器自调节液压张紧系统 Equipped with accumulator self-adjusting hydraulic tensioning system.

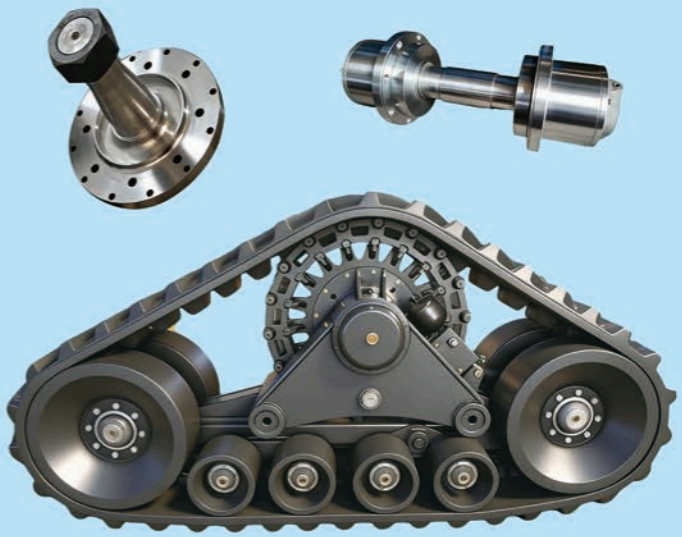

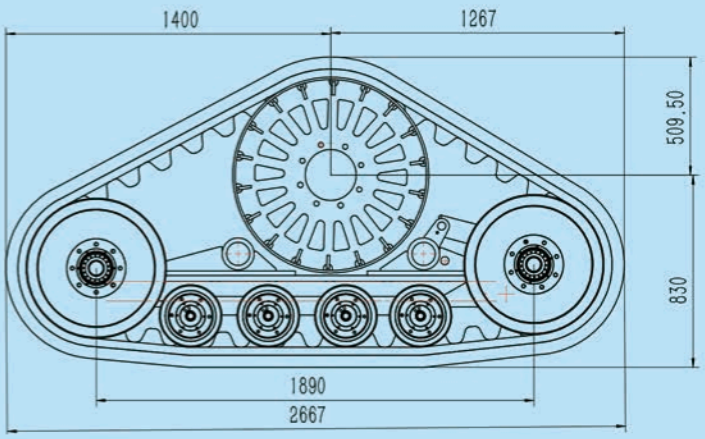

地　址：山东省济宁市高新区杨家河创业园C区
公司官网：https://kangtui.en.alibaba.com
联 系 人：张广良
电话及 WhatsApp：+8618660707027
电子邮箱：zgliang3333@gmail.com

Address: District C, Yangjiahe Pioneer Park, High-tech Zone, Jining City, Shandong Province
Company Website: https://kangtui.en.alibaba.com
Contact Person: Guangliang Zhang
Tel & WhatsApp: +8618660707027
Email: zgliang3333@gmail.com

纵使泥泞坎坷，掘鑫履带伴你一路前行
Through mud and rough terrain, our track systems keep you moving