STS93-700 STS93-800

济宁康推机电设备有限公司
Jining Kangtui Electromechanical Equipment Co., Ltd.

• 农机履带规格 •
Specifications of Agricultural Machinery Tracks

技术参数 Technical Parameters		
产品型号 Product Mode	STS93-700	STS93-800
配套机型 Matching Model	LOVO	GK120
	CLAAS	370/380
	CASE	4077HD/4088/4099
	JohnDeere	C440/W100/R2300/1175
	New Hollang	4088/CR8.90/CX8090/TX32/TX5.90/8040
长 Length	2655mm	
宽 Width	747mm	800mm
履带板宽度 Track plate width	700mm	800mm
高 Height	1390mm	
接地面积 Ground Contact Area	1.85㎡	2.12㎡
重量 Weight,	1460kg（单个） (PerUnit)	
外形尺寸 Overall dimensions	2655×1390×747 (mm) 2655×1390×800 (mm)	

性能特点 Performance Characteristics
★驱动轮直径提升 50%，收割速度同步提升 50%，作业效率大幅提升 Drive wheel diameter increased by 50%, harvesting speed increased by 50% simultaneously, and operating efficiency greatly improved.
★降低车辆接地比压，显著增强复杂地形通过能力 Reduces the ground pressure of the vehicle and significantly enhances the passability on complex terrains.
★配备免维护支重轮、张紧轮组，搭配油浸式链条，使用寿命更长 Equipped with maintenance-free support wheels and tensioner wheel sets, matched with oil-immersed chains for a longer service life.
★锻打加厚履带板，结构坚固耐磨，使用寿命持久 Forged and thickened track plates, sturdy and wear-resistant structure, long service life.
★全新专利设计，安装简便，减轻轮毂减速机负荷，保证左右履带平行度，减少磨损，延长使用寿命 New patented design, easy installation, reduces the load on the wheel hub reducer, ensures parallelism of left and right tracks, minimizes wear and extends service life.
★支持长度与中心高度定制，适配各类设备需求 Supports customization of length and center height to meet the needs of various equipment.



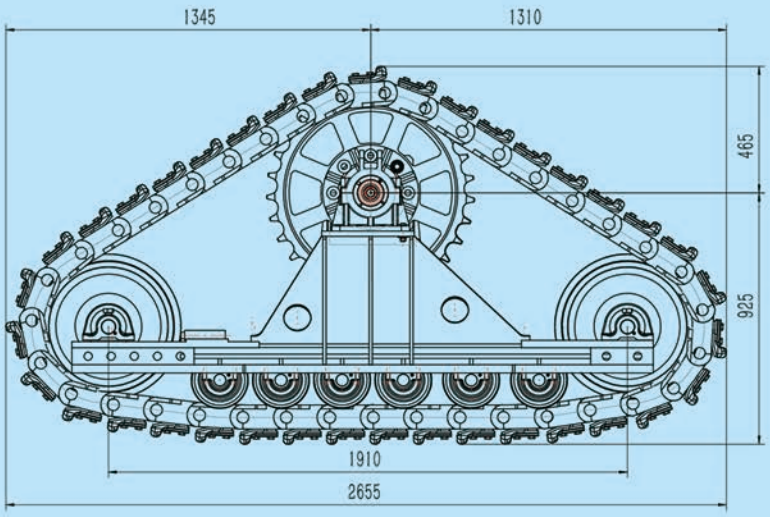

地　　址：山东省济宁市高新区杨家河创业园C区
公司官网：https://kangtui.en.alibaba.com
联 系 人：张广良
电话及 WhatsApp：+8618660707027
电子邮箱：zgliang3333@gmail.com

Address: District C, Yangjiahe Pioneer Park, High-tech Zone, Jining City, Shandong Province
Company Website: https://kangtui.en.alibaba.com
Contact Person: Guangliang Zhang
Tel & WhatsApp: +8618660707027
Email: zgliang3333@gmail.com

纵使泥泞坎坷，掘鑫履带伴你一路前行
Through mud and rough terrain, our track systems keep you moving